


EMF-INCQUERY

Incremental evaluation of model queries

Model Driven Systems Development
Lecture 04




MOTIVATION

Motivation: Early validation of design rules


SystemSignalGroup design rule (from AUTOSAR)

Mapping ISignals to IPDUs

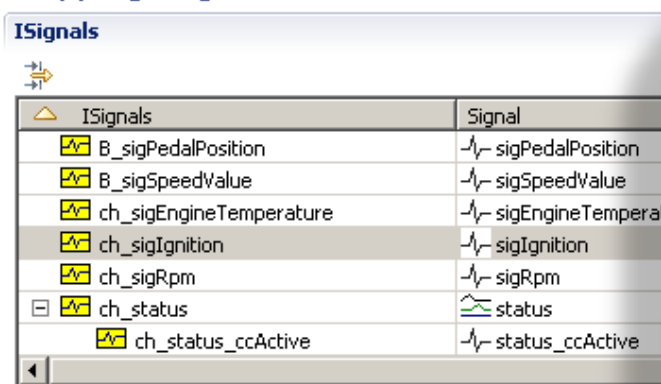

ISignals	Signal
B_sigPedalPosition	sigPedalPosition
B_sigSpeedValue	sigSpeedValue
ch_sigEngineTemperature	sigEngineTempera
ch_sigIgnition	sigIgnition
ch_sigRpm	sigRpm
ch_status	status
ch_status_ccActive	status_ccActive


Position of ISignals in the selected IPDU



Model tree System editor: demoSystem

Element description Problems

0 errors, 2 warnings, 0 others

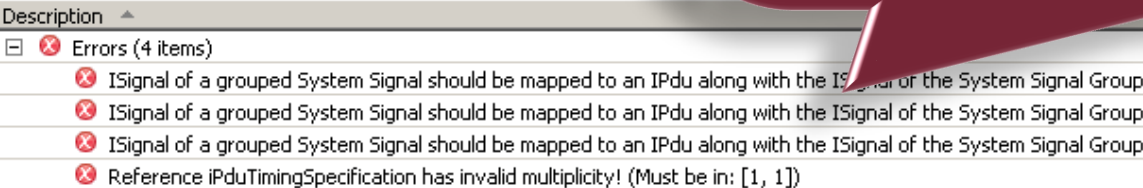

Description
✗ ISignal of a grouped System Signal should be mapped to an IPdu along with the ISignal of the System Signal Group
✗ ISignal of a grouped System Signal should be mapped to an IPdu along with the ISignal of the System Signal Group
✗ ISignal of a grouped System Signal should be mapped to an IPdu along with the ISignal of the System Signal Group
✗ Reference IPduTimingSpecification has invalid multiplicity! (Must be in: [1, 1])

Resource	Path	Location	Type
demo_swc.arxml	/alma	/rootP...	AUTOSAR P...
demo_swc.arxml	/alma	/rootP...	AUTOSAR P...
demo_swc.arxml	/alma	/rootP...	AUTOSAR P...
demo_swc.arxml	/alma	/rootP...	AUTOSAR P...


AUTOSAR:

- standardized SW architecture of the automotive industry
 - now supported by modern modeling tools
- Design Rule/Well-formedness constraint:**
- each valid car architecture needs to respect
 - designers are immediately notified if violated

Challenge:


- >500 design rules in AUTOSAR tools
- >1 million elements in AUTOSAR models
- models constantly evolve by designers

Domain-Specific Modeling Languages

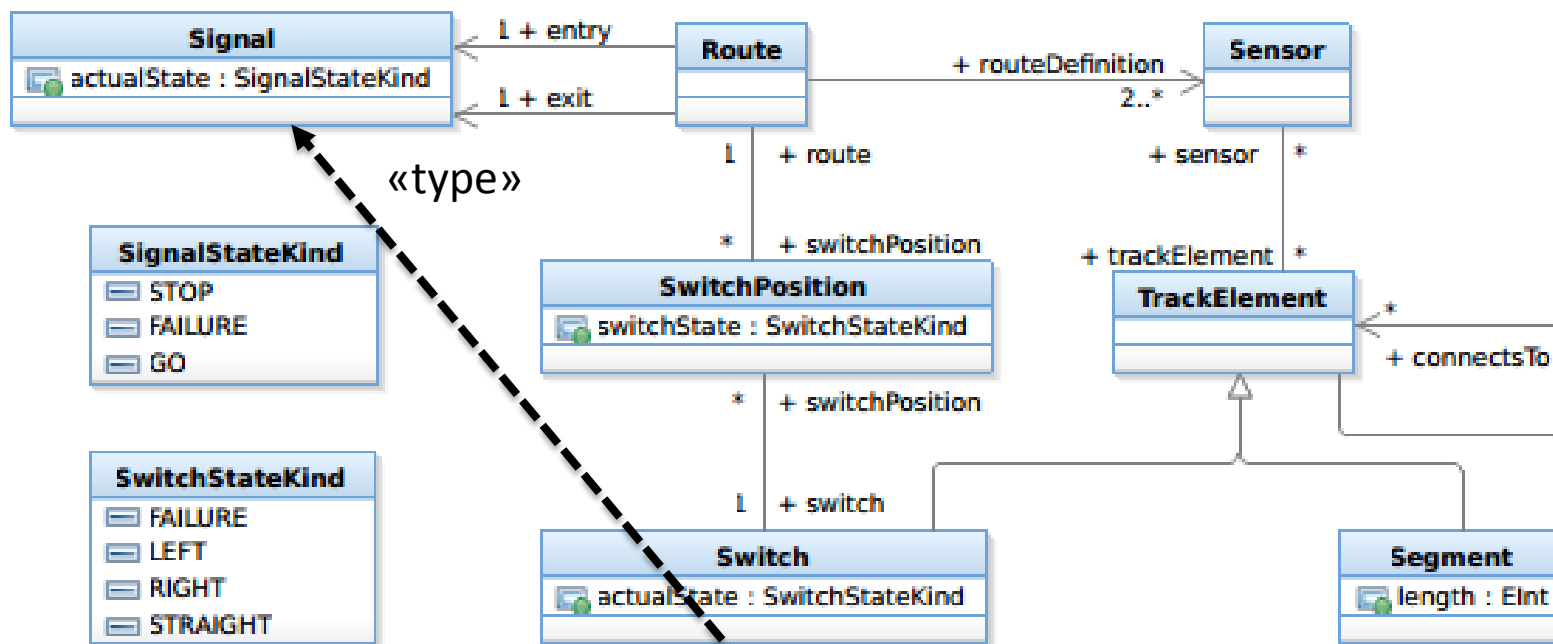


Meta-model

Model

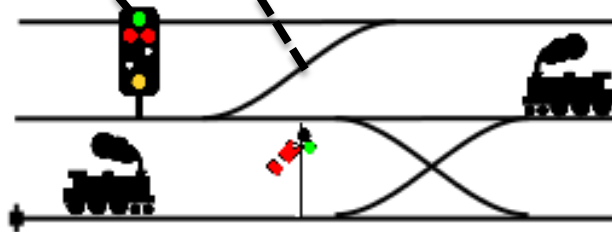


Validation of Well-formedness Constraints

Domain-specific modeling languages

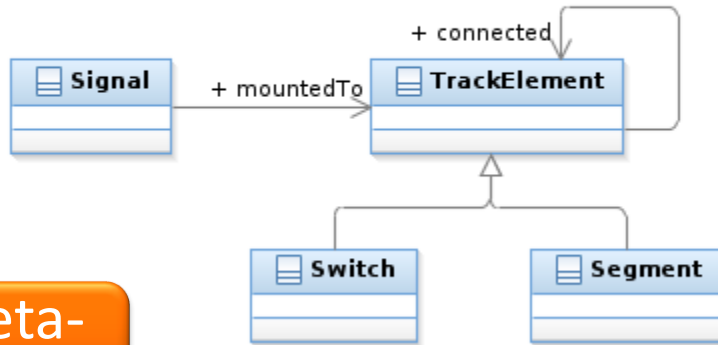

Meta-model

Model

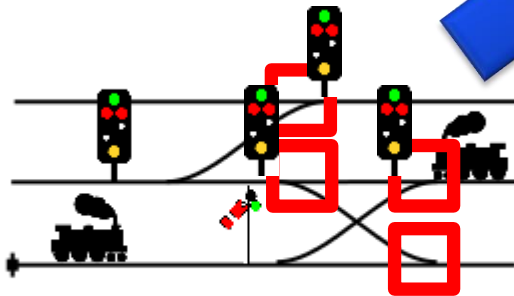

Query

```
pattern switchWOSignal(sw) {  
  Switch(sw);  
  neg find switchHasSignal(sw);  
}
```

```
pattern switchHasSignal(sw) {  
  Switch(sw);  
  Signal(sig);  
  Signal.mountedTo(sig, sw);  
}
```

Modify

Result



User

Model sizes in practice

- Models with 10M+ elements are common:
 - Car industry
 - Avionics
 - Source code analysis
- Models evolve and change continuously

Application	Model size
System models	10^8
Sensor data	10^9
Geospatial models	10^{12}

Validation can take hours

Source: Markus Scheidgen, *How Big are Models – An Estimation*, 2012.

MODEL QUERIES AND GRAPH PATTERN MATCHING

What is a model query?

- For a programmer:
 - A piece of code that searches for parts of the model
- For the scientist:
 - **Query** = set of constraints that have to be satisfied by (parts of) the (graph) model
 - **Result** = set of model element tuples that satisfy the constraints of the query
 - **Match** = bind constraint variables to model elements
- A query engine: Support
 - the definition&execution of model queries

Query(A,B) $\leftarrow \wedge \text{cond}_i(A_i, B_i)$


- all tuples of model elements a, b
- satisfying the query condition
- along the match $A=a$ and $B=b$
- parameters A,B can be input/ output

Categorization of Query Languages

- Hard to write?
- Your options
 - Java (or C/C++, C#, ...)
 - Declarative languages (OCL, EMF Query 1-2, ...)



	Imperative query languages	Declarative query languages
Expressive power	☹ (you write lots of code)	☺ (very concise)
Safety	☺☺ (precise control over what happens at execution)	☹☹ (unintended side-effects)
Learning curve	☺ (you already know it)	☹ (may be difficult to learn)
Reusability	☺ (standard OO practices)	☹☹ (???)
Performance	☹☺ (considerable manual optimization necessary)	☺☹ (depends on various factors)

Graph Pattern Matching for Queries

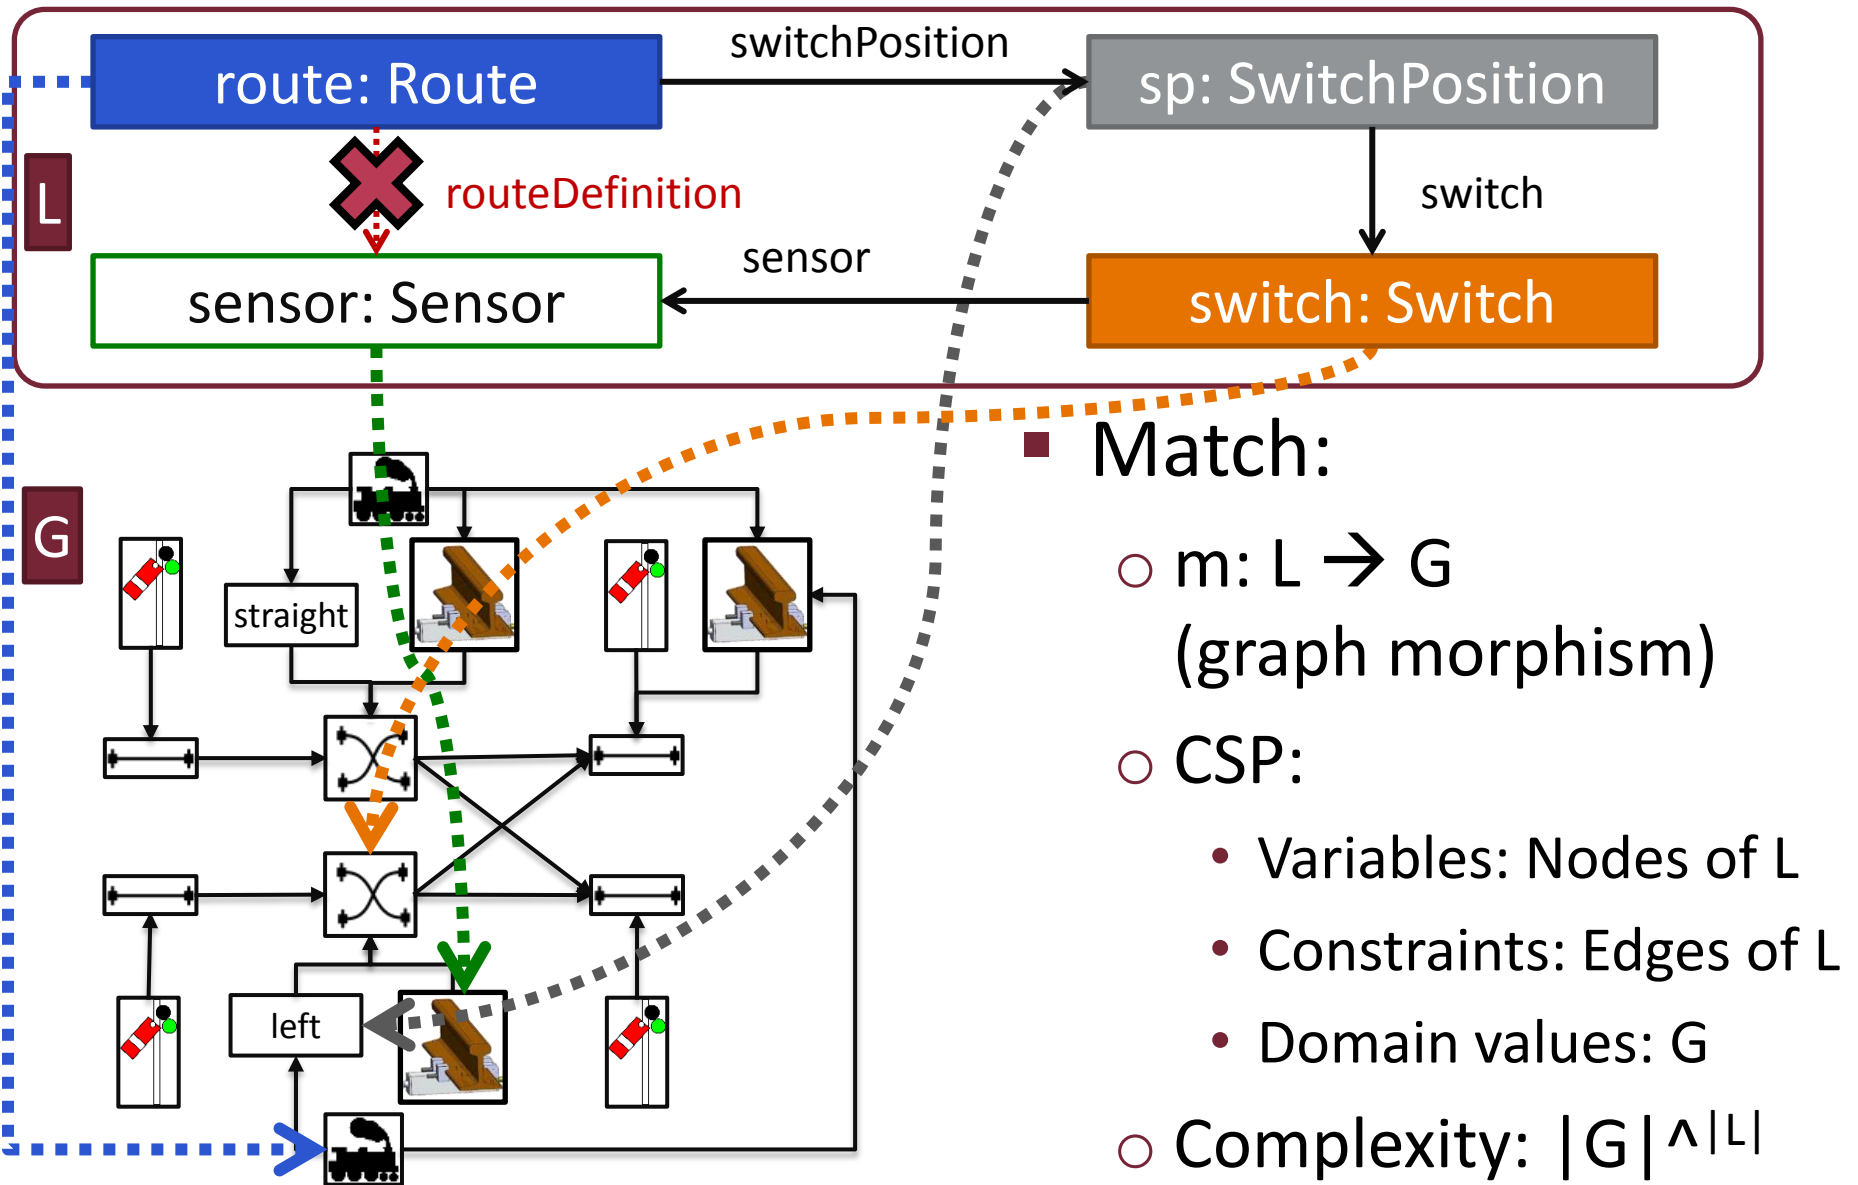



All sensors with a switch that belongs to a route must directly be linked to the same route.

Graph Pattern Matching (Local Search)

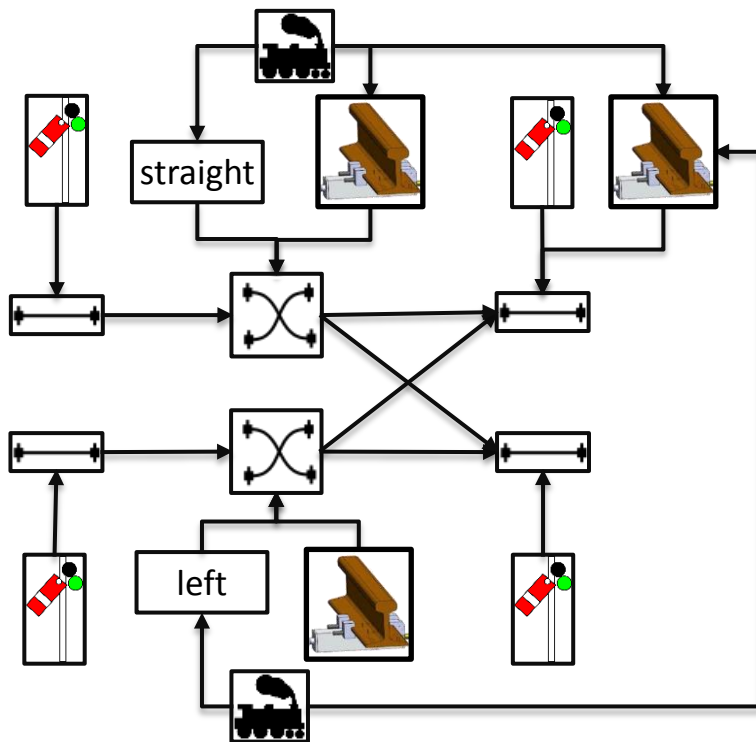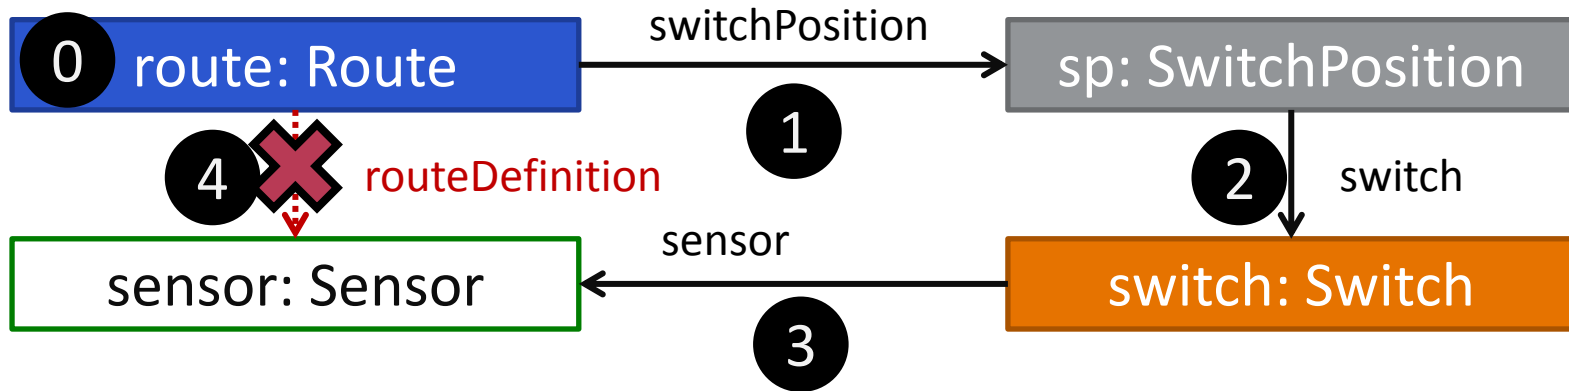


- Search Plan:
 - Select the first node to be matched
 - Define an ordering on graph pattern edges
- Search is restarted from scratch each time



Graph Pattern Matching (Local Search)

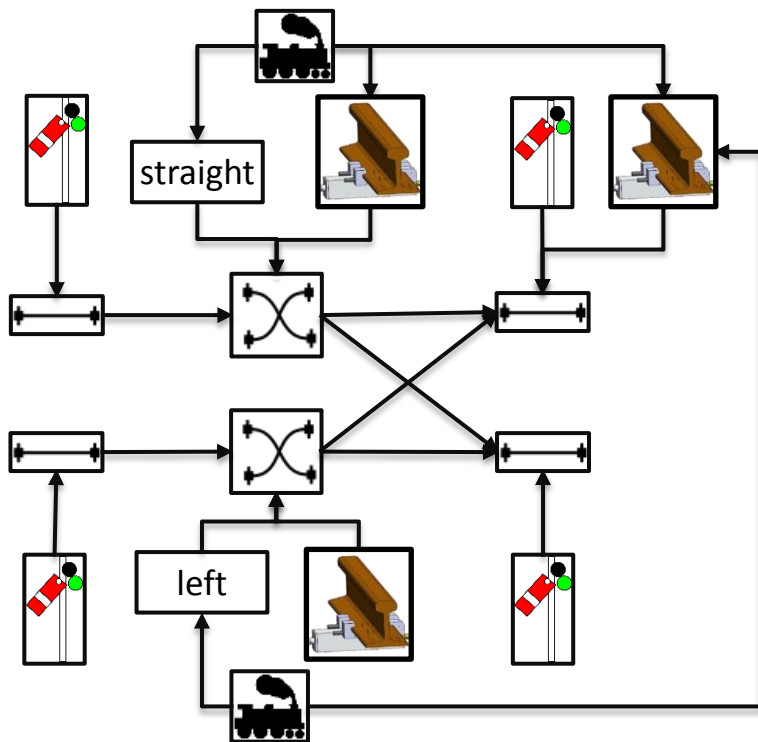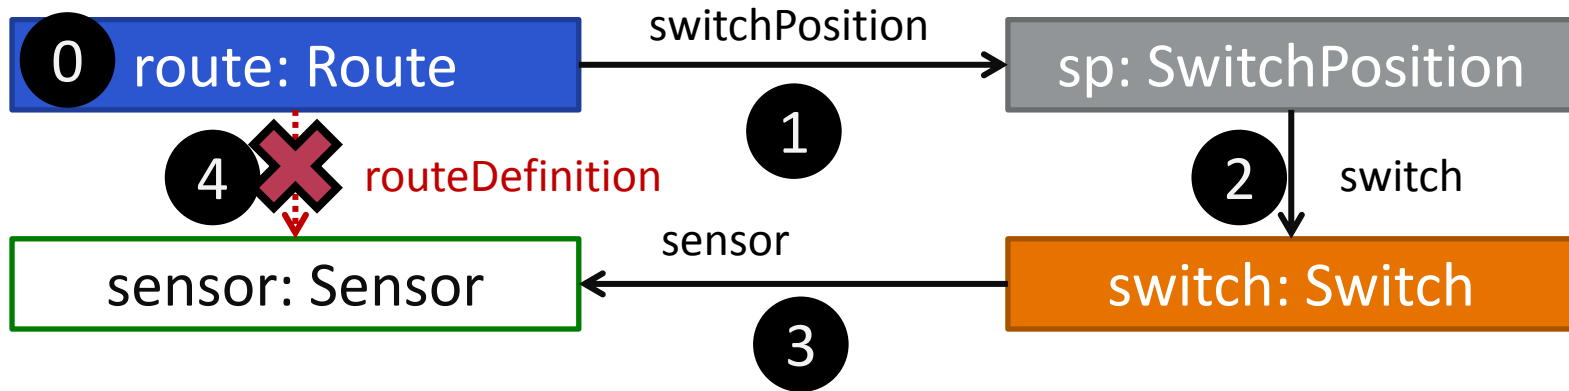


Search Tree:

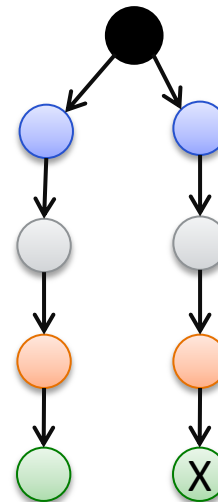

Graph Pattern Matching (Local Search)

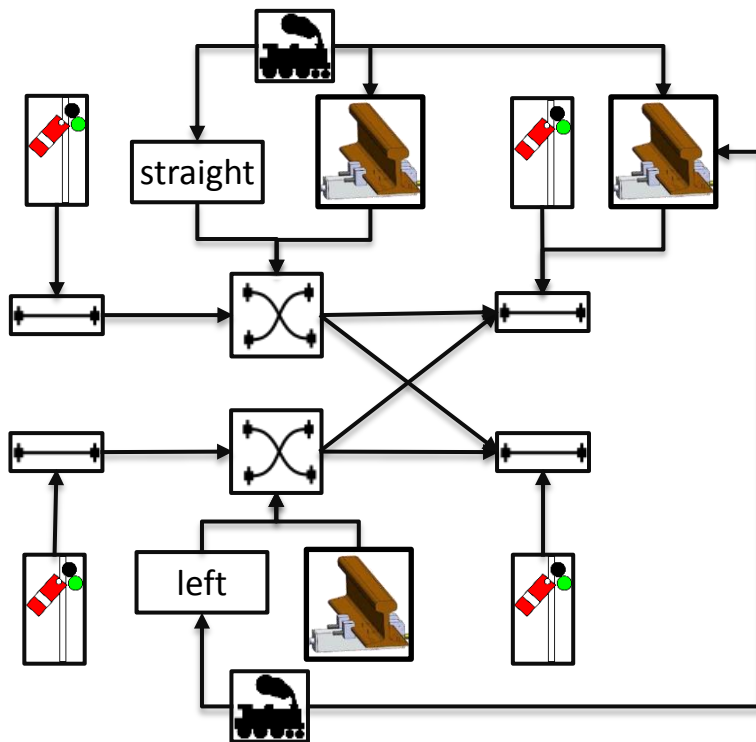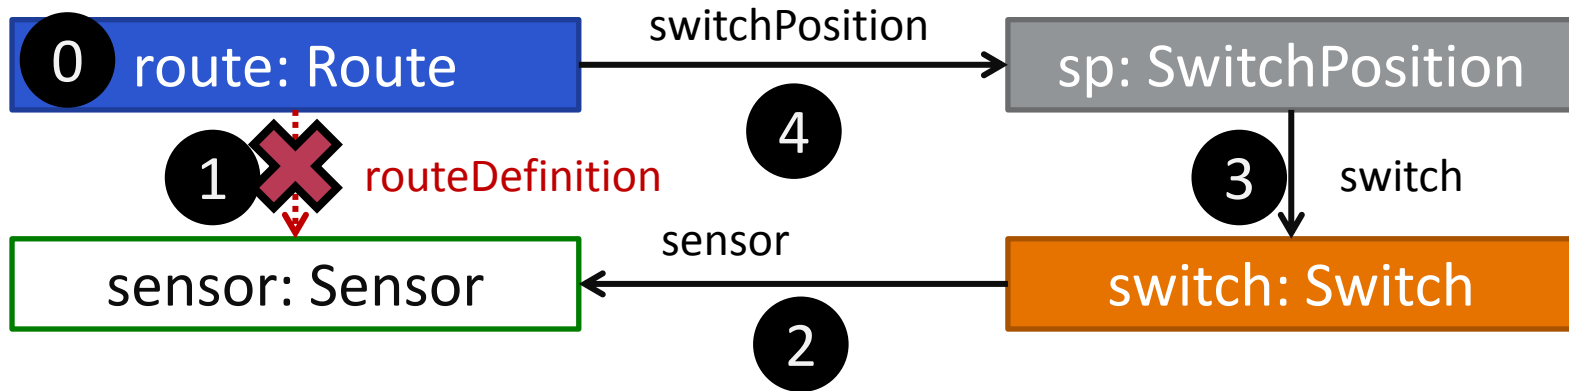

Alternate Search Tree:

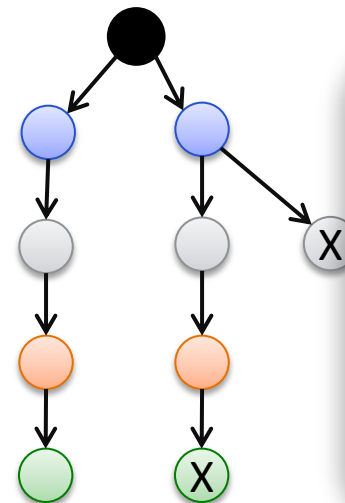

Local Search based PM


- Runtime depends on search plan
- Good search plan: narrow at root wide at leaves

INCREMENTALITY IN QUERIES AND TRANSFORMATIONS


Performance of query evaluation

- Query performance = Execution time as a function of
 - Query complexity
 - Model size
 - Result set size
- Motivation for incrementality
 - Don't forget previously computed results!
 - Models changes are usually small, yet up-to-date query results are needed all the time.
 - Incremental evaluation is an essential, but not a well supported feature.

Incremental Graph Pattern Matching

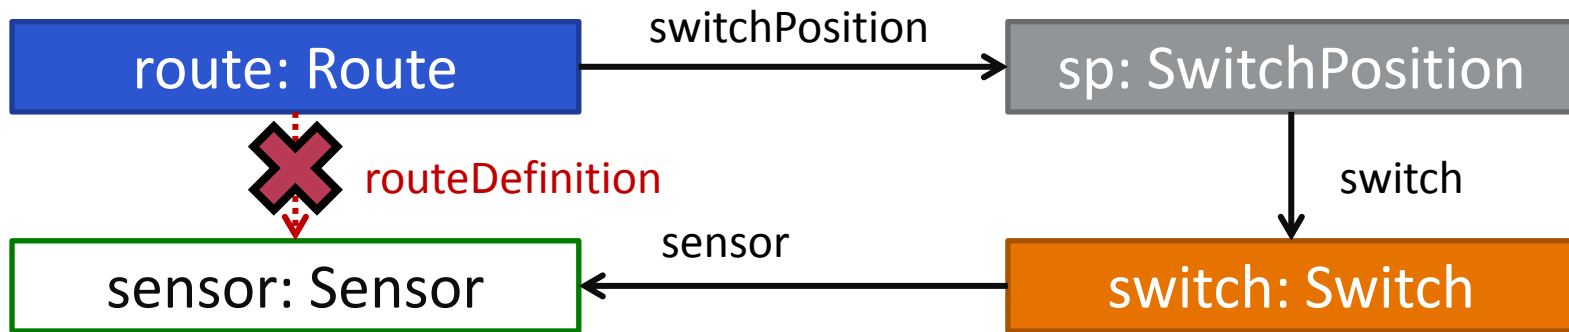

route	sp	switch	sensor
r1	sp1	sw1	

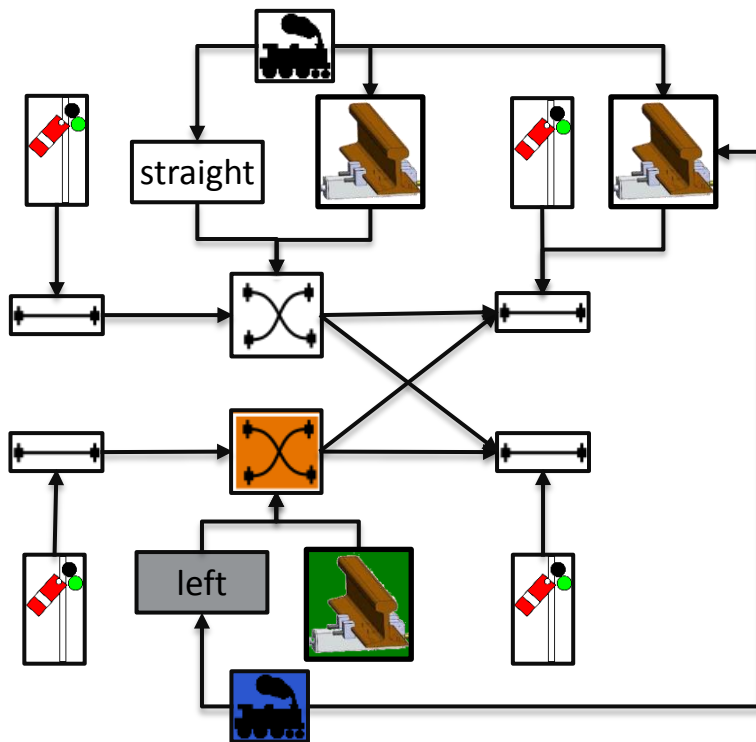

- Main idea: More space to less time
 - Cache matches of patterns
 - Instantly retrieve match (if valid)
 - Update caches upon model changes
 - Notify about relevant changes
- Approaches:
 - TREAT, LEAPS, RETE, ...
 - Tools: VIATRA, GROOVE, MoTE, TCore

Batch vs. Live Query Scenarios

■ Batch query

(pull / request-driven):

1. Designer selects a query
2. One/All matches are calculated
3. Rule is applied on one/all matches
4. All Steps 1-3 are redone if model changes

- Query results obtained upon designer demand

■ Live query

(push / event-driven):

1. Model is loaded
2. Rule system is loaded
3. Calculate full match set
4. Model is changed (rules fired or designer updates)
5. Iterate Steps 3 and 4 until rule system is stopped

- Query results are always available for designer

EMF-IncQuery: An Open Source Eclipse Project

- **Declarative graph query language**
 - Transitive closure, Negative cond., etc.
 - Compositional, reusable

Definition



- **Incremental evaluation**
 - Cache result set
 - Maintain incrementally upon model change

Execution



- Derived features,
- On-the-fly validation
- View generation,
- Works out-of-the-box with EMF applications


Features



<http://eclipse.org/incquery>

INCREMENTAL MODEL QUERIES: THE LANGUAGE

The IncQuery (IQ) Graph Query Language

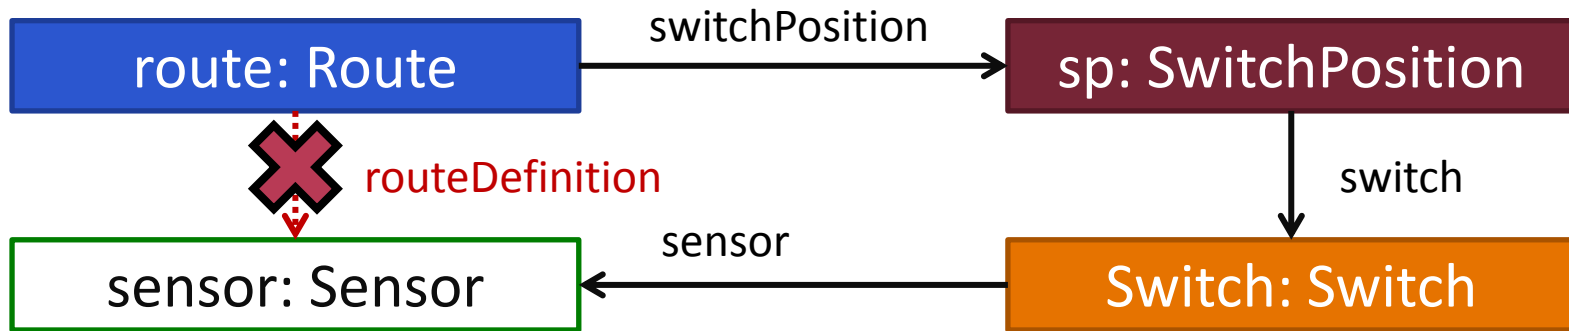


```
pattern routeSensor(sensor: Sensor) = {  
  TrackElement.sensor(switch,sensor);  
  Switch(switch);  
  SwitchPosition.switch(sp, switch);  
  SwitchPosition(sp);  
  Route.switchPosition(route, sp);  
  Route(route);  
  neg find head(route, sensor);  
}  
pattern head(R, Sen) = {  
  Route.routeDefinition(R, Sen);  
}
```

- IQ: declarative query language
 - Attribute constraints
 - Local + global queries
 - Compositionality+Reusability
 - Recursion, Negation,
 - Transitive Closure over Regular Path Queries
 - Syntax: DATALOG style

Example

Statecharts metamodel

Other detailed examples

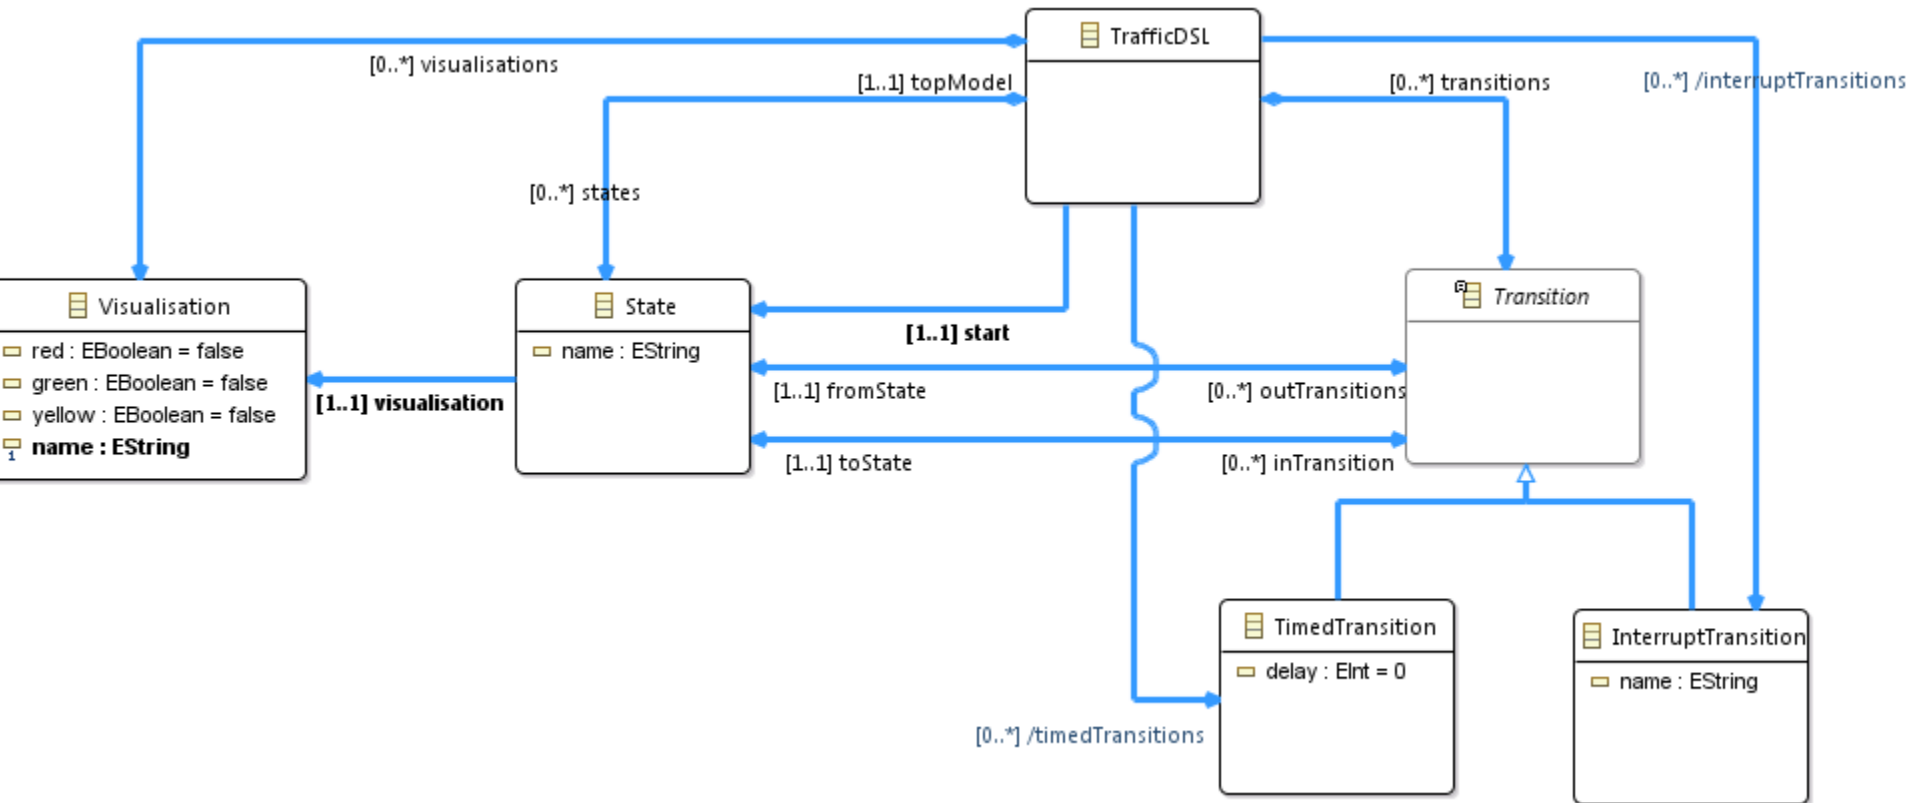

```
// S is a state of a statemachine with name N
pattern state(S:State, N) {
    State.name(S,N);
}

// Old VIATRA style
pattern state(S,N) {
    State(S);
    State.name(S,N);
}

// Smart type inference
pattern state(S,N) {
    State.name(S,N);
}

// Checks if a state is red
pattern redState(S: State) {
    State.visualisation.red(S, true);
    State.visualisation.green(S, false);
    State.visualisation.yellow(S, false);
}
```

Simple queries

Query definition

```
// S is a state of a statemachine with name N
```

```
pattern state(S:State, N) {
```

```
    State.name(S,N);
```

```
}
```

```
// Old VIATRA style
```

```
pattern state(S,N) {
```

```
    State(S);
```

```
    State.name(S,N);
```

```
}
```

```
// Smart type inference
```

```
pattern state(S,N) {
```

```
    State.name(S,N).
```

```
}
```

```
// Checks if a state is red
```

```
pattern redState(S: State) {
```

```
    State.visualisation.red(S, true);
```

```
    State.visualisation.green(S, false);
```

```
    State.visualisation.yellow(S, false);
```

```
}
```

Syntactic sugar

Query parameter

Type constraint

Attribute navigation

Path expression

Support for built-in EMF datatypes:
Strings, integers, etc.

```
// S is a state of a statemachine with name N
pattern state(S:State, N) {
    State.name(S,N);
}
```

```
// Old VIATRA style
pattern state(S,N) {
    State(S);
    State.name(S,N);
}
```

```
// Smart type inference
pattern state(S,N) {
    State.name(S,N);
}
```

```
// Checks if a state is red
pattern redState(S: State) {
    State.visualisation.red(S);
    State.visualisation.green(S);
    State.visualisation.yellow(S);
}
```

```
// T is a timed transition between a
// from state and a to state with delay D
pattern timedTransition(T,from,to,D) {
    Transition.fromState(T,from);
    Transition.toState(T,to);
    TimedTransition(T);
    TimedTransition.delay(T,D);
}
```

```
// T is an interrupt transition between a
// from state and a to state with delay D
pattern interruptTransition(T,from,to,E) {
    Transition.fromState(T,from);
    Transition.toState(T,to);
    InterruptTransition(T);
    InterruptTransition.name(T,E);
}
```

Pattern composition / call

```
// The result of Event is non-deterministic in State
pattern nondeterministicState(State, Event) {
    find interruptTransition(_, State, To1, Event);
    find interruptTransition(_, State, To2, Event);
    To1 != To2;
}
// No timed transition going out of a State
pattern noTimedTransition(State) {
    State(State);
    neg find timedTransition(_, State, _, _);
}
```

Negative application
condition

Anonymous variables
(see Prolog)

```
pattern transition(from,to) {  
  Transition.fromState(T,from);  
  Transition.toState(T,to);  
}
```

```
pattern reachable(from:State,to:State) {  
  from == to;  
} or {  
  find transition+(from,to);  
}
```


```
pattern unreachableState(S:State) {  
  TrafficDSL.states(dsl,S);  
  TrafficDSL.start(dsl,Start);  
  neg find reachable(Start,S);  
}
```

Disjunction
(on pattern level)

Transitive closure
(over 2 param patterns)

Note that:

- negative calls do not bind variables of header parameters
- patterns should be connected by edges (avoid Cartesian product)

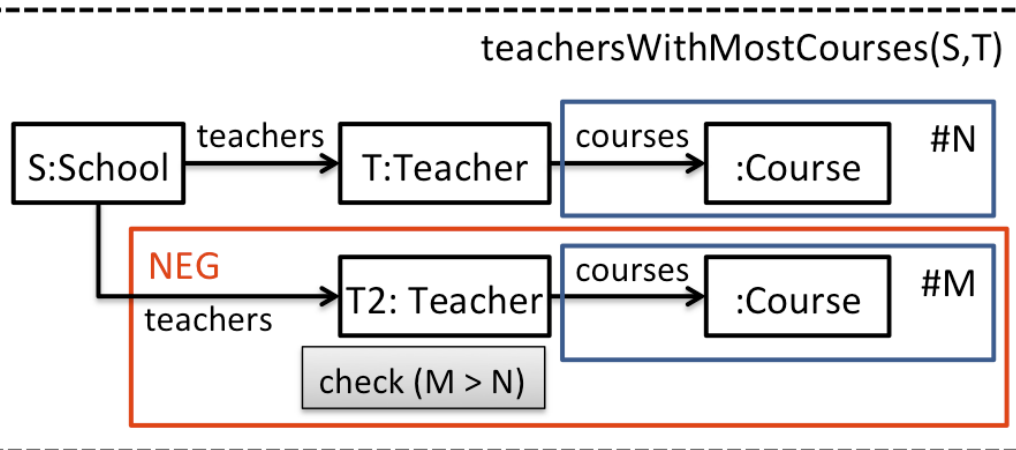

pattern teachersWithMostCourses(
 School : **School**, Teacher : **Teacher**) = {
 School.teachers(School,Teacher);
neg find moreCourses(Teacher);}

pattern moreCourses(Teacher : **Teacher**) = {
 N == **count find** coursesOfTeacher(Teacher,_Course);
 M == **count find** coursesOfTeacher(Teacher2,_Course2);
Teacher(Teacher2);
 Teacher != Teacher2;
check(N < M);}

Check expression
 for attribute values
 (pure!)

Overview of IncQuery Pattern Language

- Features of the pattern language
 - Works with any (*pure*) EMF based DSL and application
 - Reusability by pattern composition
 - Arbitrary recursion, negation
 - Generic and parameterized model queries
 - Bidirectional navigability of edges / references
 - Immediate access to all instances of a type
 - Complex change detection
- Benefits
 - Fully declarative + Scalable performance

INCQUERY Development Tools

- Works with most EMF-based editors out-of-the-box
- Reveals matches as selection

Pattern Editor

Queries are applied & updates on-the-fly

Query Explorer

EMF-IncQuery: An Open Source Eclipse Project

- **Declarative graph query language**
 - Transitive closure, Negative cond., etc.
 - Compositional, reusable

Definition



- **Incremental evaluation**
 - Cache result set
 - Maintain incrementally upon model change

Execution



- Derived features,
- On-the-fly validation
- View generation,
- Works out-of-the-box with EMF applications


Tooling




<http://eclipse.org/incquery>

OVERVIEW OF INCREMENTAL QUERY EVALUATION

Development workflow

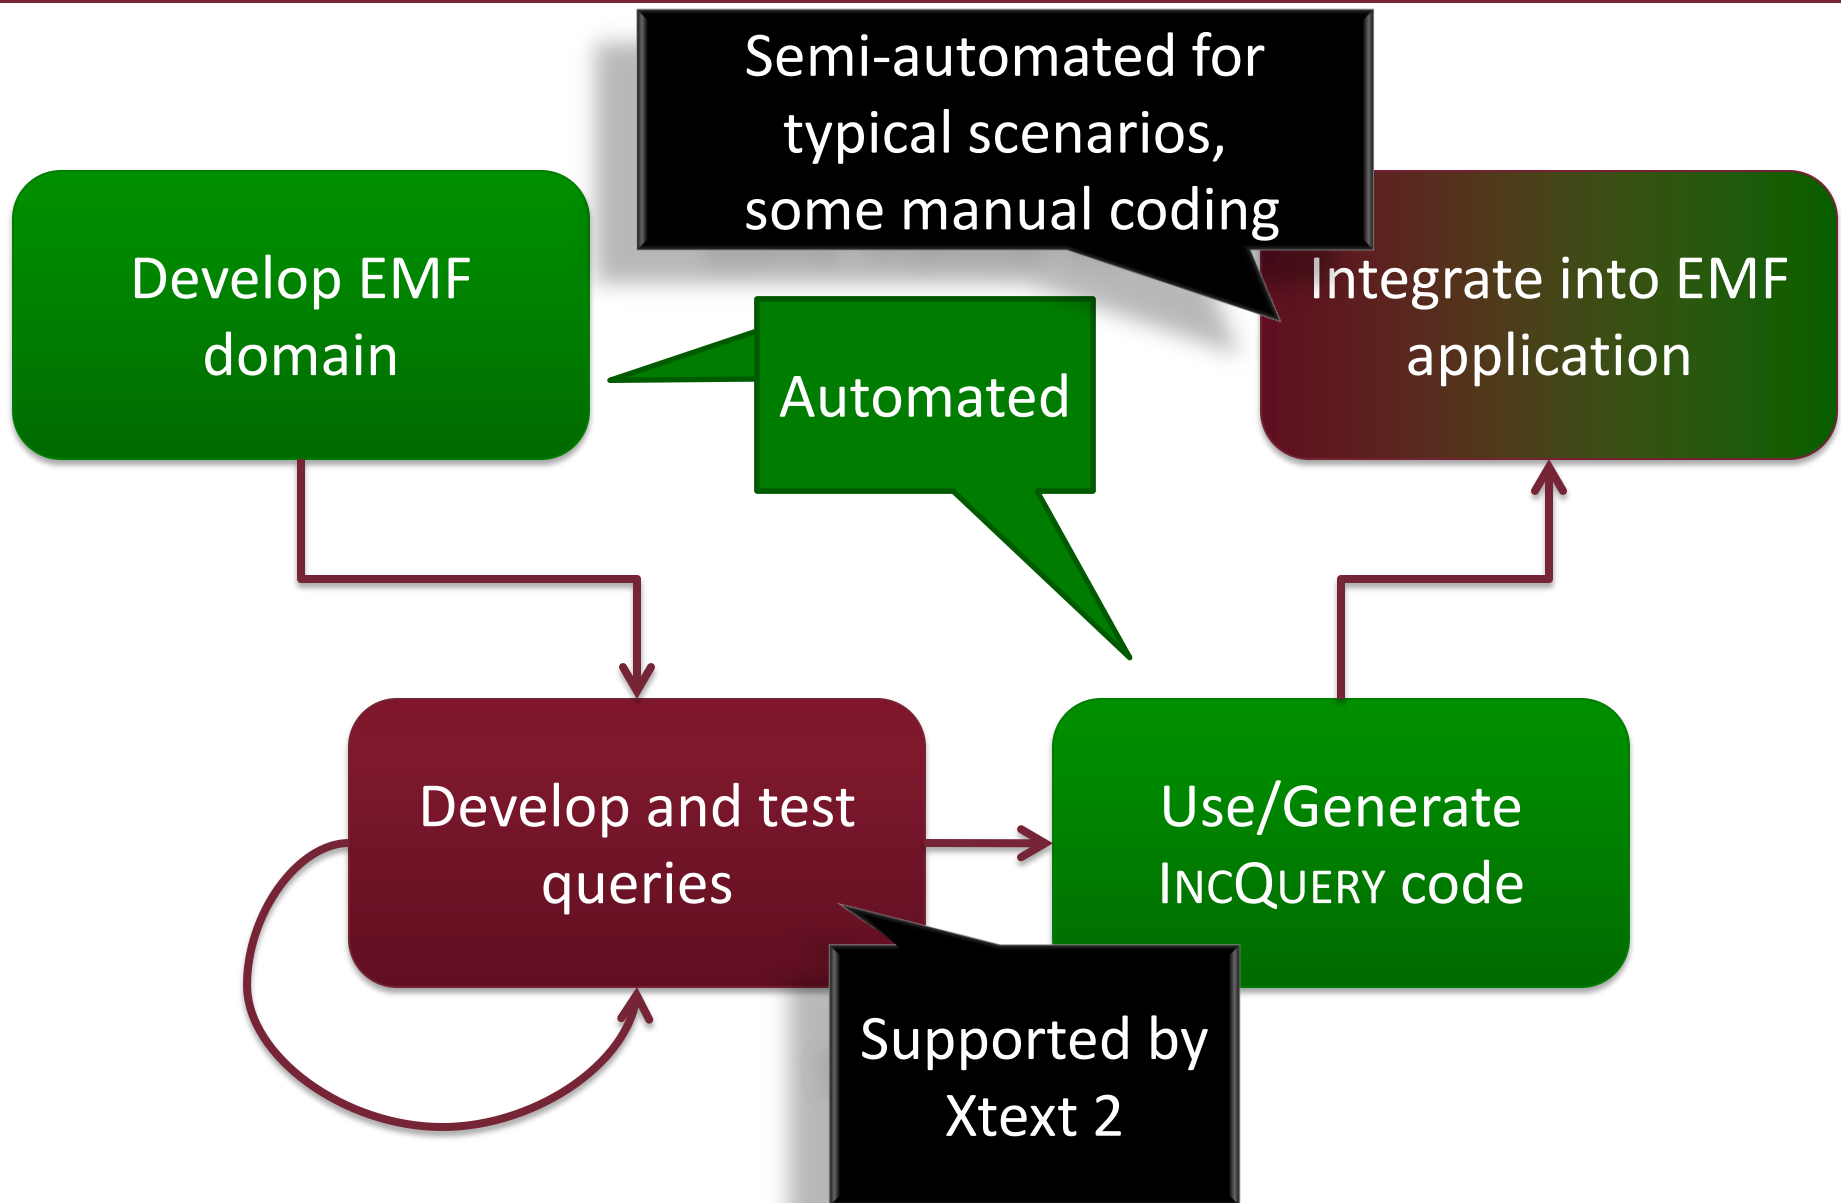


EMF-INCQUERY Architecture v0.8


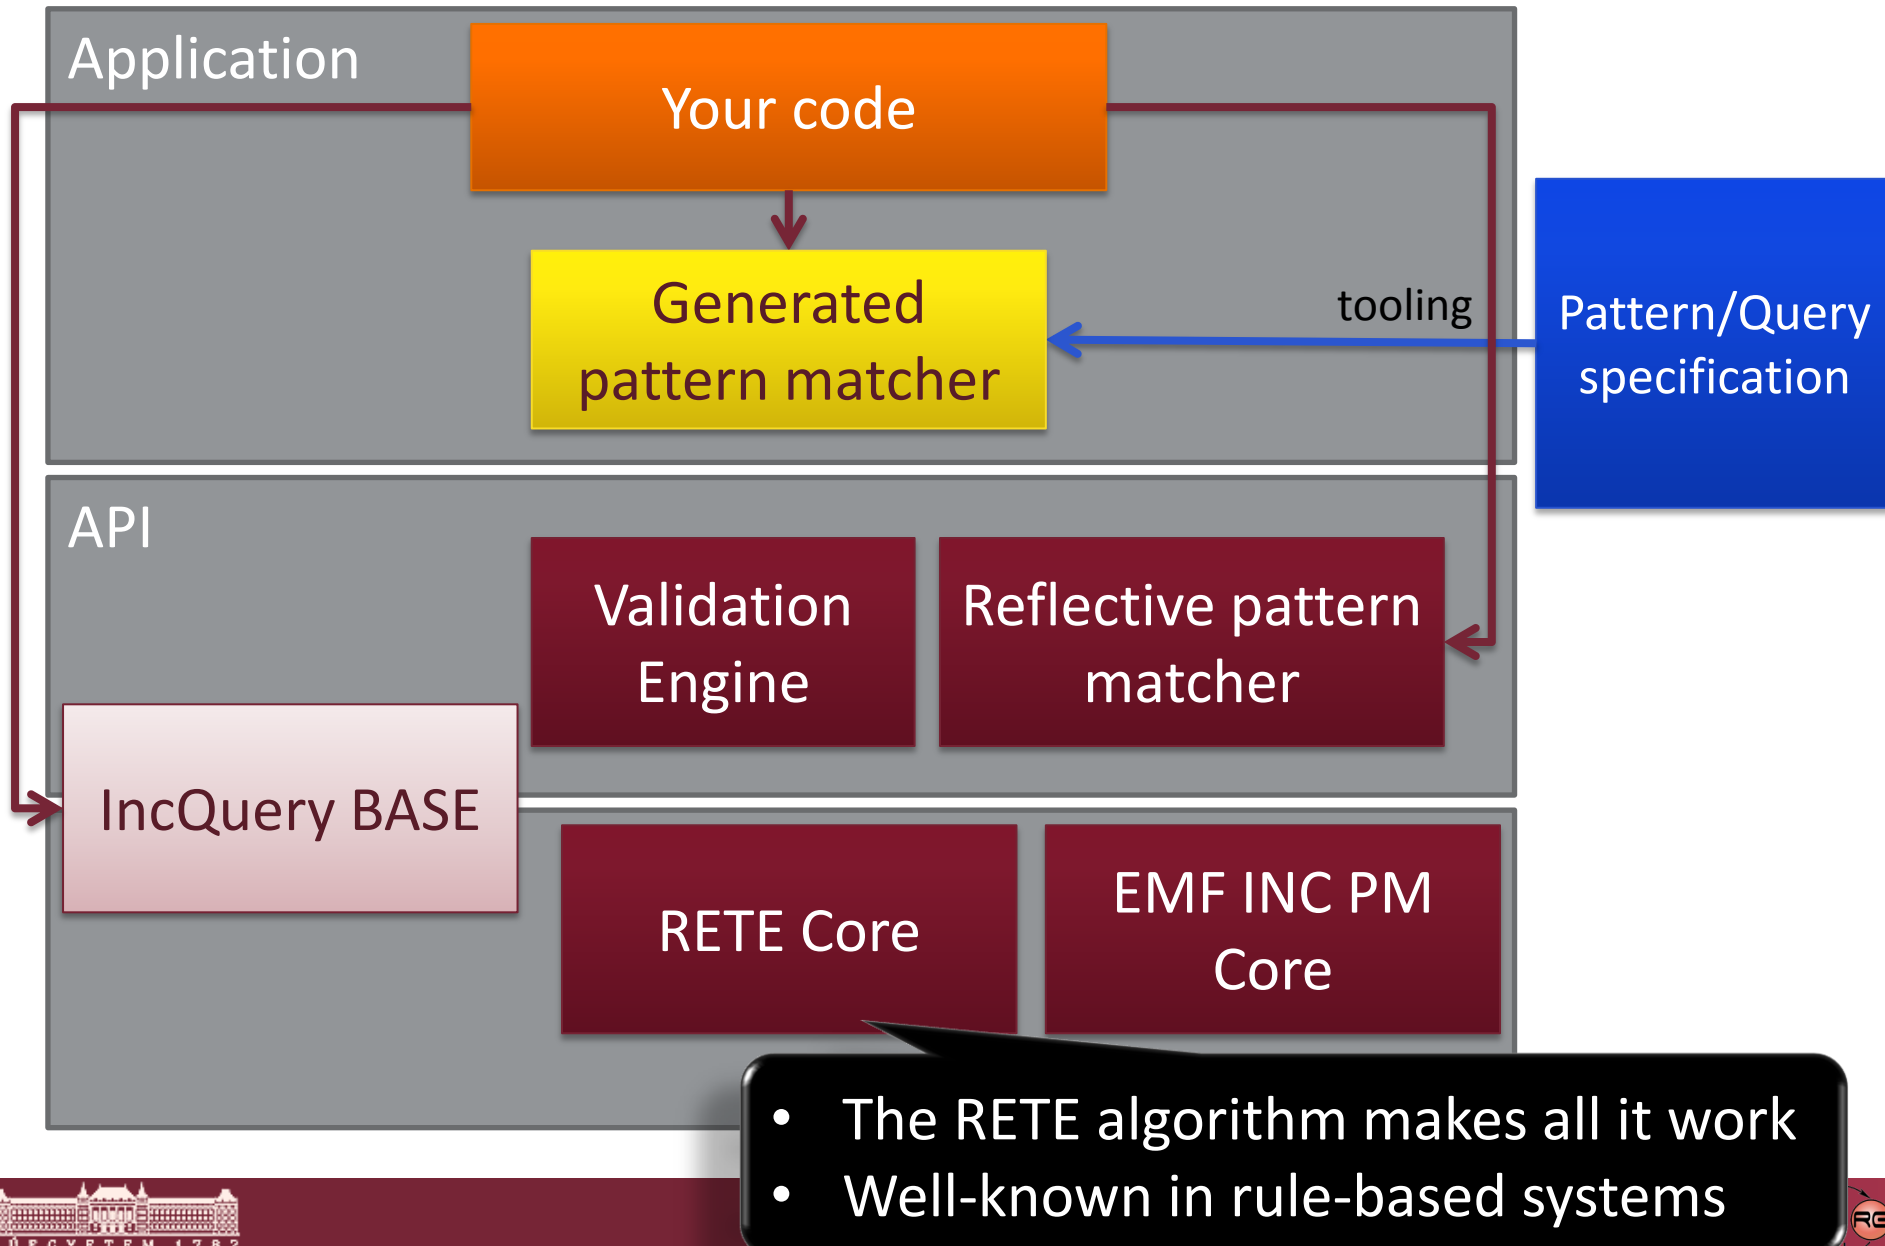


Incremental Query Evaluation by RETE


- AUTOSAR well-formedness validation rule

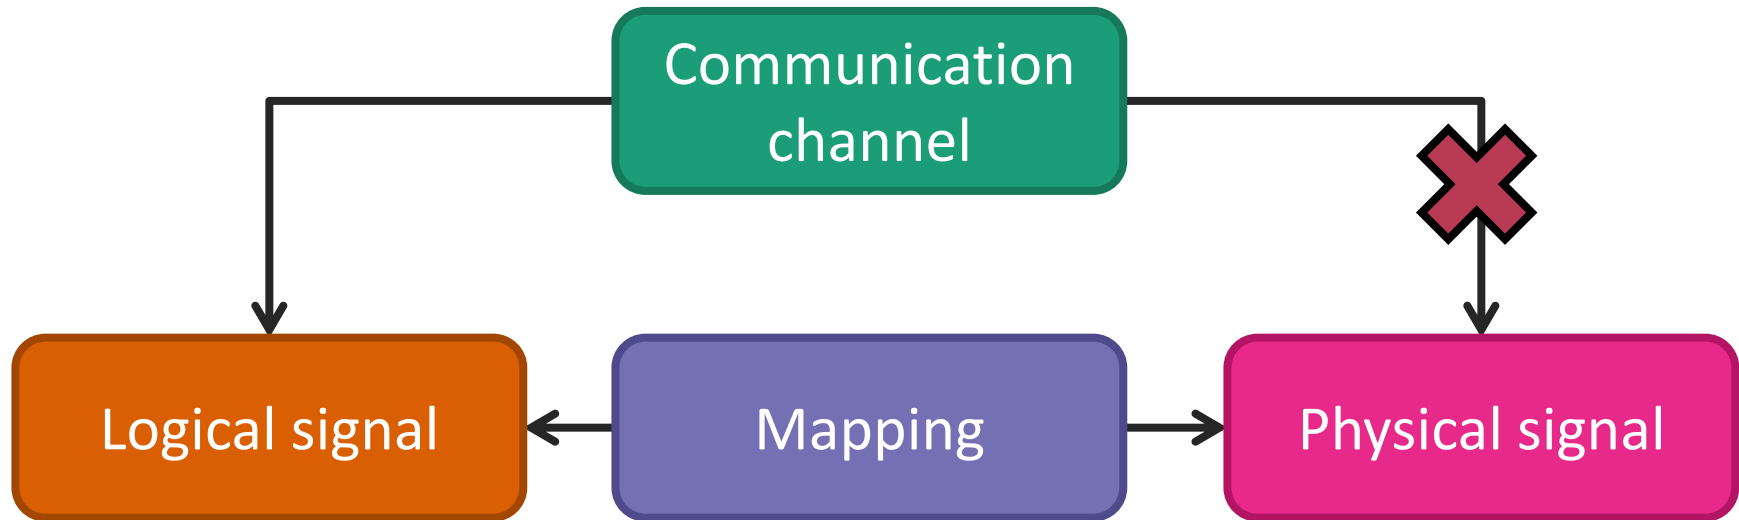


- Instance model

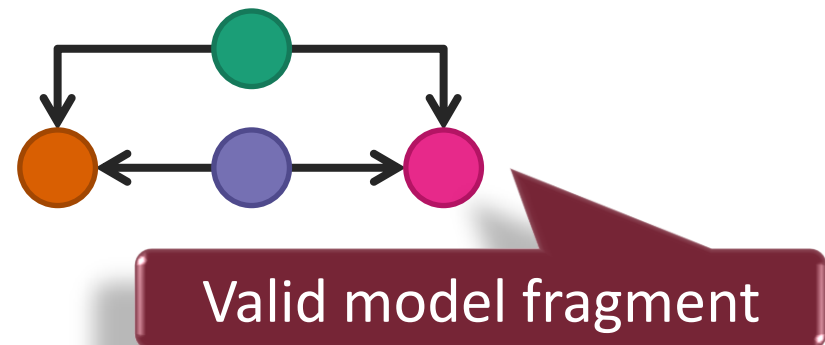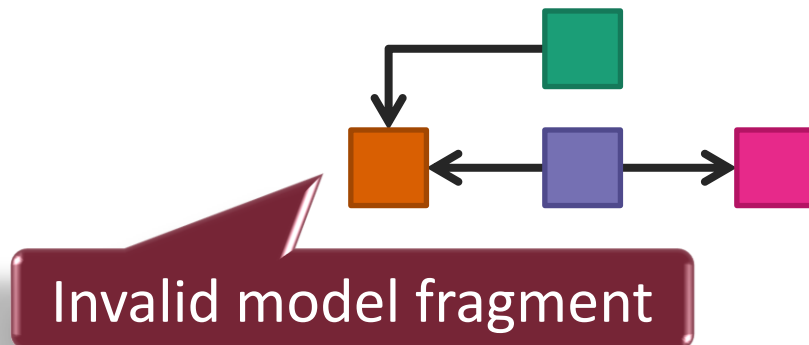

Incremental Query Evaluation by RETE

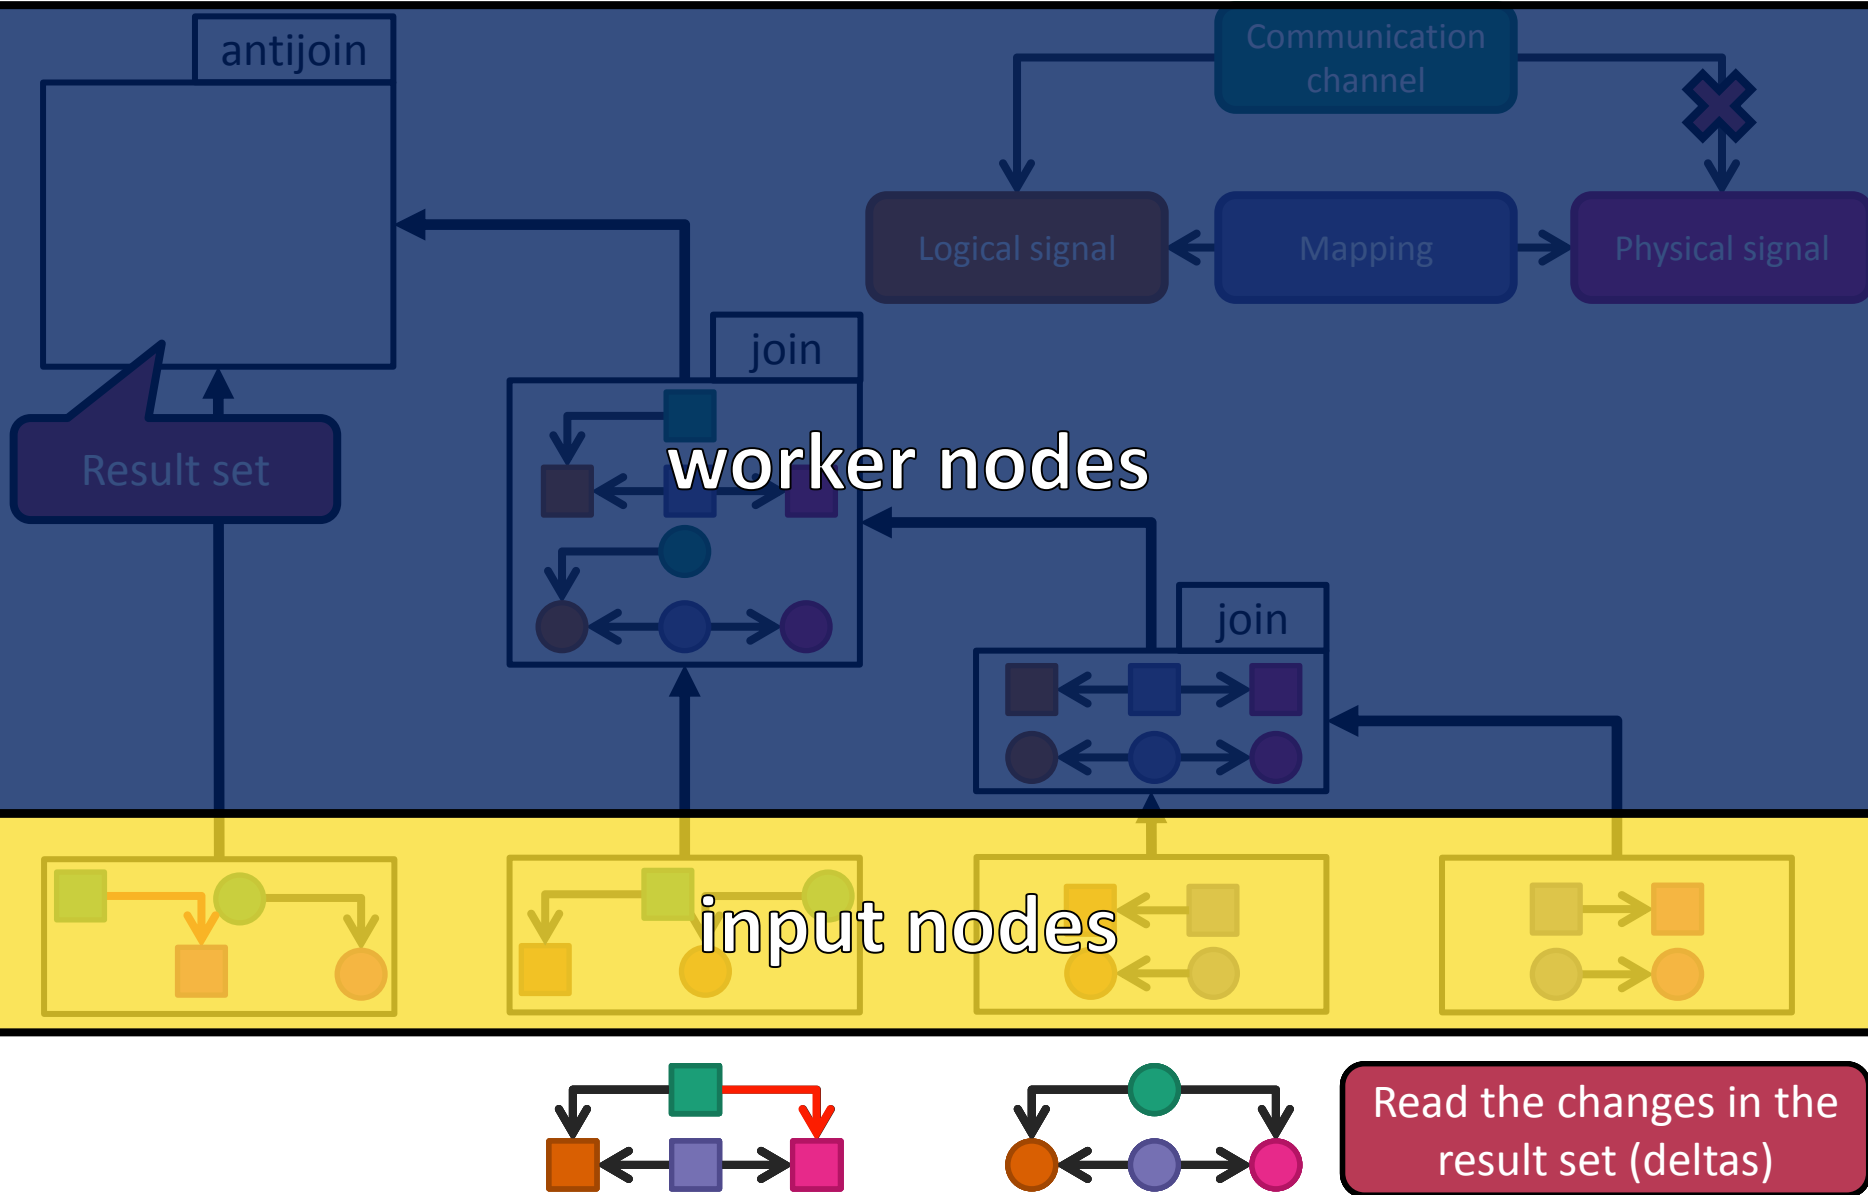


Construction of RETE network

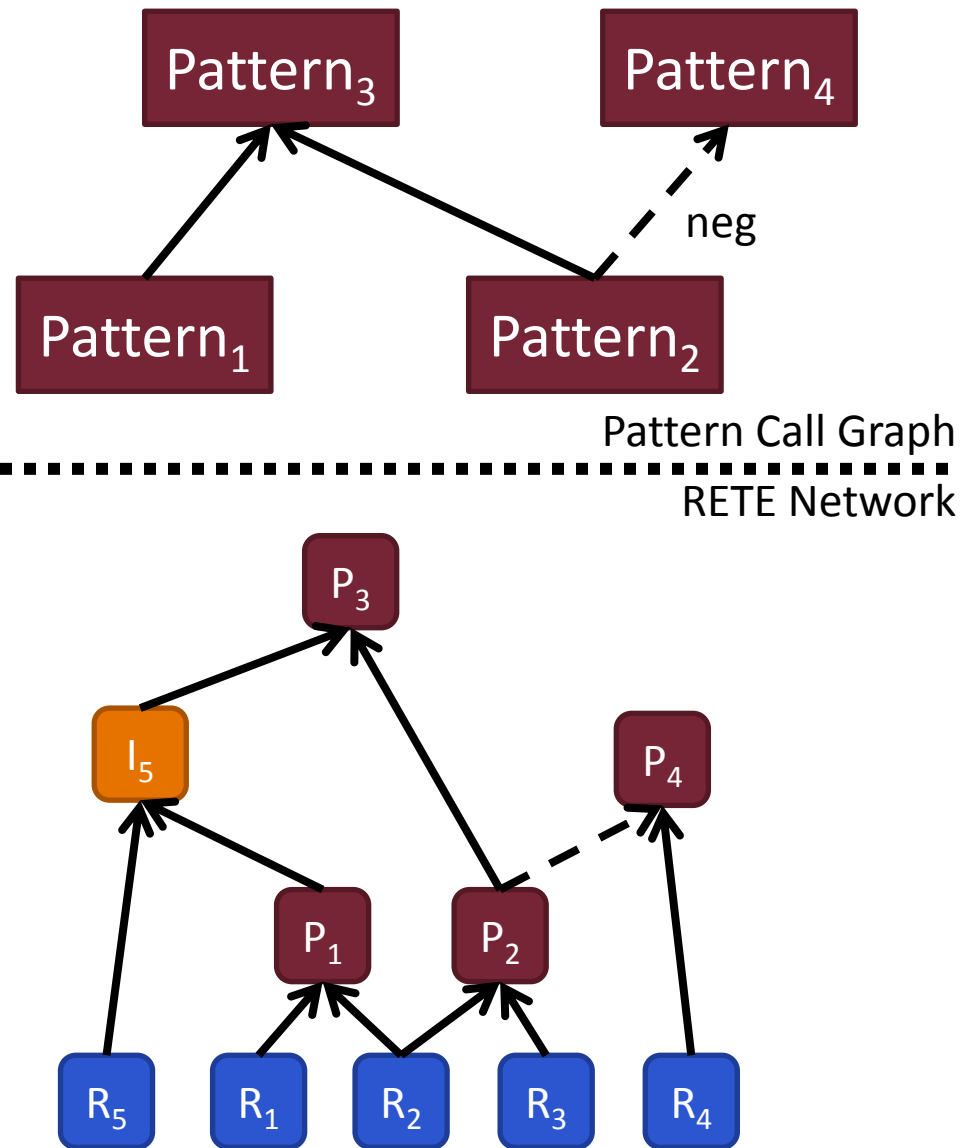

- **Single network for all patterns**
- **Node sharing:**
controlled by the developer
(pattern call graph)
- RETE visualization
- Advanced construction algorithm
by dynamic programming:
G. Varró et. al (ICMT 2013)

EMF-INCQUERY Architecture v0.8

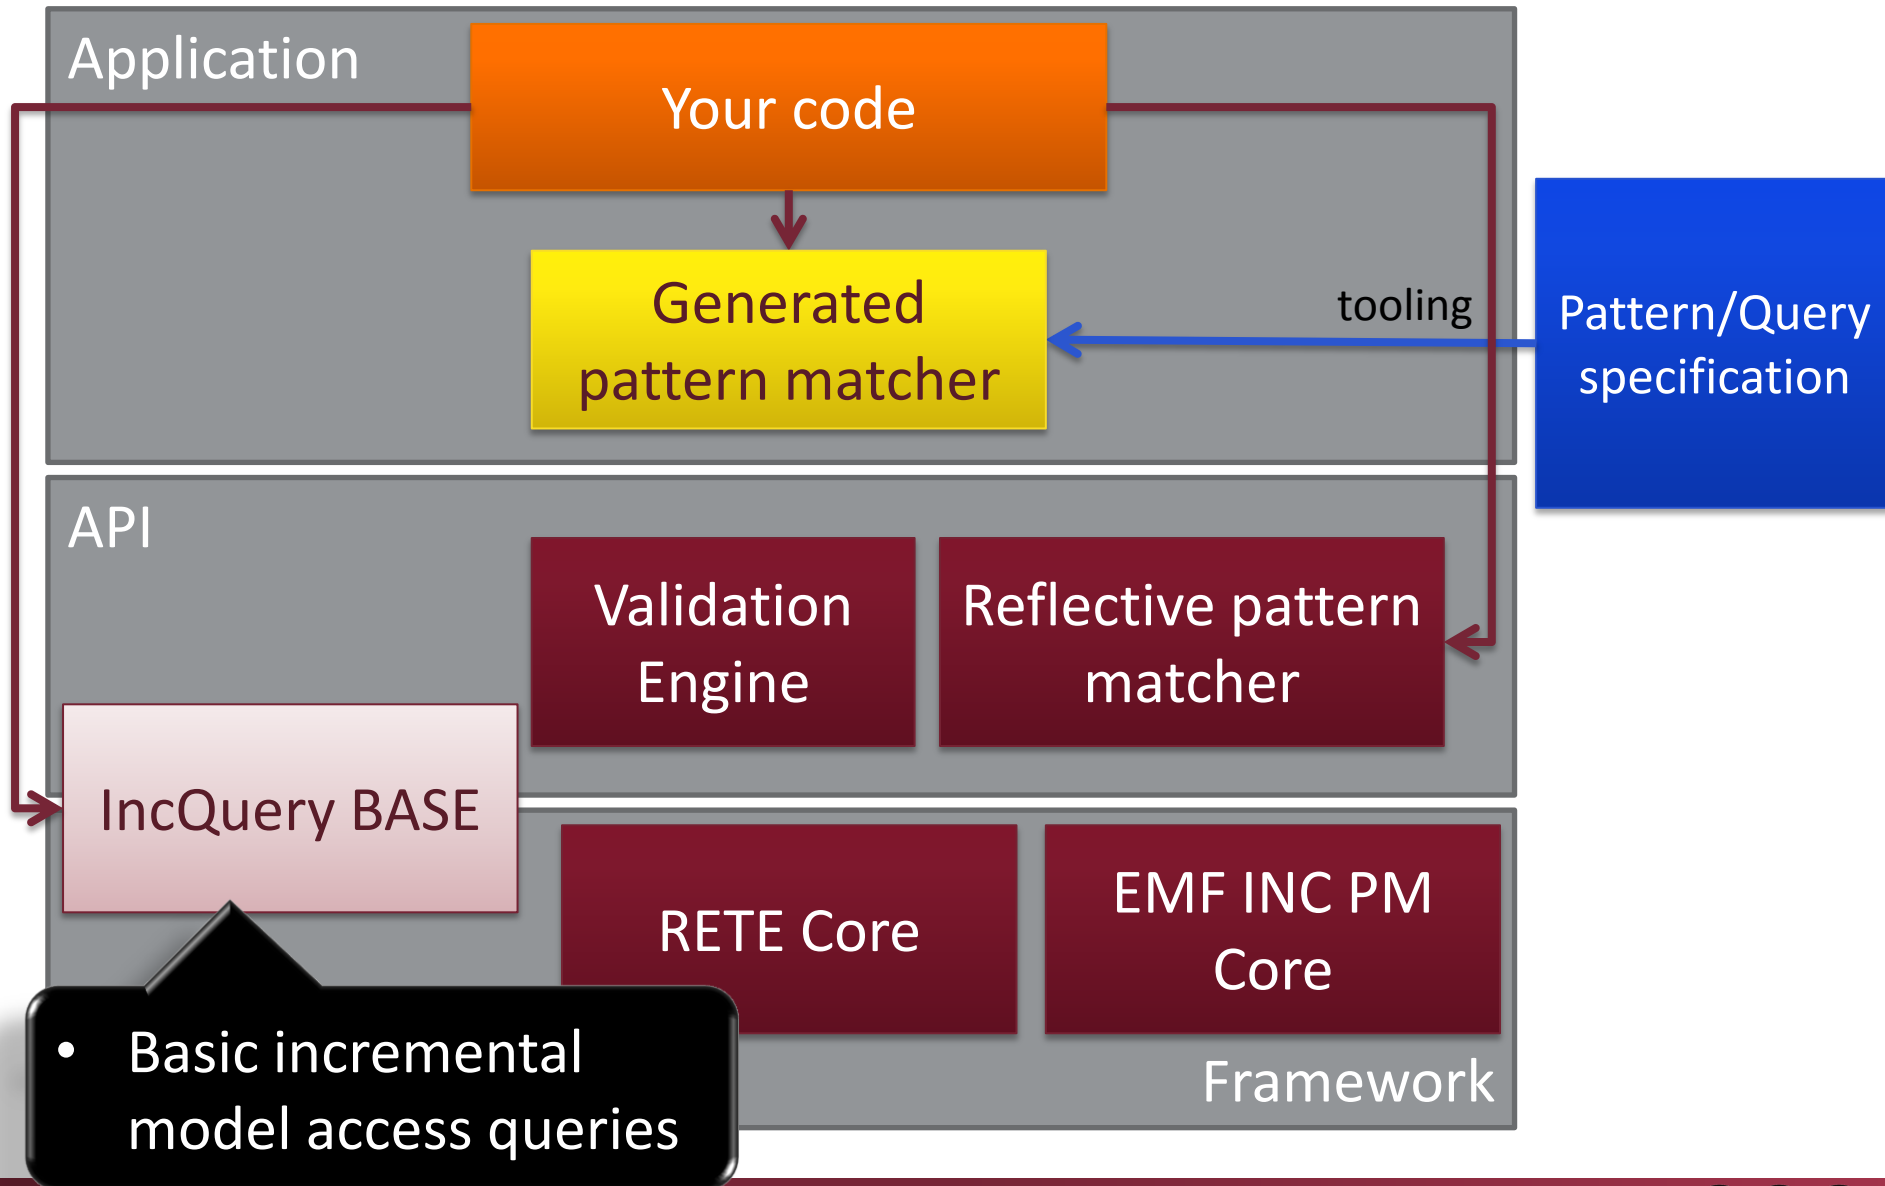

IncQuery Base

- Light-weight Java library for basic (yet very powerful) EMF model access queries with **incremental evaluation**
- Supports
 - Get all instance elements by type
 - Reverse navigation along references
 - Get model elements by attribute value/type
- Very easy to integrate into any EMF tool (pure Java) – **standalone!**
- Same high performance and scalability as IncQuery
- Incremental transitive closure
 - Computation of e.g. reachability regions, connected model partitions, ...
 - Innovative new algorithm for general graphs

EMF-IncQuery: An Open Source Eclipse Project

- **Declarative graph query language**
 - Transitive closure, Negative cond., etc.
 - Compositional, reusable

Definition



- **Incremental evaluation**
 - Cache result set
 - Maintain incrementally upon model change

Execution



- Derived features,
- On-the-fly validation
- View generation,
- Works out-of-the-box with EMF applications

Tooling



<http://eclipse.org/incquery>

INCQUERY VALIDATION FRAMEWORK

IncQuery Validation Framework

- Simple validation engine
 - Supports on-the-fly validation through incremental pattern matching and problem marker management
 - Uses IncQuery graph patterns to specify constraints
- Simulates EMF Validation markers
 - To ensure compatibility and easy integration with existing editors
 - Doesn't use EMF Validation directly
 - Execution model is different

Well-formedness rule specification by graph patterns

- WFRs: *Invariants* which must hold at all times
- Specification = set of elementary constraints + context
 - Elementary constraints: Query (pattern)
 - Location/context: a model element on which the problem marker will be placed
- Constraints by graph patterns
 - Define a pattern for the “bad case”
 - Either directly
 - Or by negating the definition of the “good case”
 - Assign one of the variables as the location/context

Match:
A violation of
the invariant

EXAMPLE

Statechart validation constraint

- “All interrupt names on transitions going out of a single state must be distinct.”
- Capture the bad case as a query
 - There are two outgoing interrupt transitions triggered by the same event
- Add a @constraint annotation to derive an error/warning message

```
// The result of Event is non-deterministic in State
@Constraint(location = A, message = "$A.name$ is a bad looping activity",
severity = "warning" )
pattern nondeterministicState(A, Event) {
    find interruptTransition(_,A,To1,Event);
    find interruptTransition(_,A,To2,Event);
    To1 != To2;
}

// No timed transition going out of a State
@Constraint(location = State, message = "There should be at most one timed
transition going from a state", severity = "error")
pattern noTimedTransition(State) {
    State(State);
    neg find timedTransition(_,State,_,_);
}
```

Validation lifecycle

■ Constraint violations

- Represented by Problem Markers (Problems view)
- Marker text is updated if affected elements are changed in the model
- Marker removed if violation is no longer present

■ Lifecycle

- Editor bound validation (markers removed when editor is closed)
- Incremental maintenance not practical outside of a running editor

Validation UI integration

- A menu item (command) to start the validation engine
- Generic (part of the IncQuery Validation framework)
 - GMF editor command
 - Appears in all GMF-based editor's context menu
 - Sample Reflective Editor command
 - Appears on the toolbar
- Generated
 - EMF generated tree editor command
 - Appears on the toolbar


CALCULATING DERIVED FEATURES BY INCREMENTAL QUERIES

Metamodels with Derived Features

/interruptTransitions(A,B):

- B is an InterruptTransition
- B is a transition in A

Derived
Reference

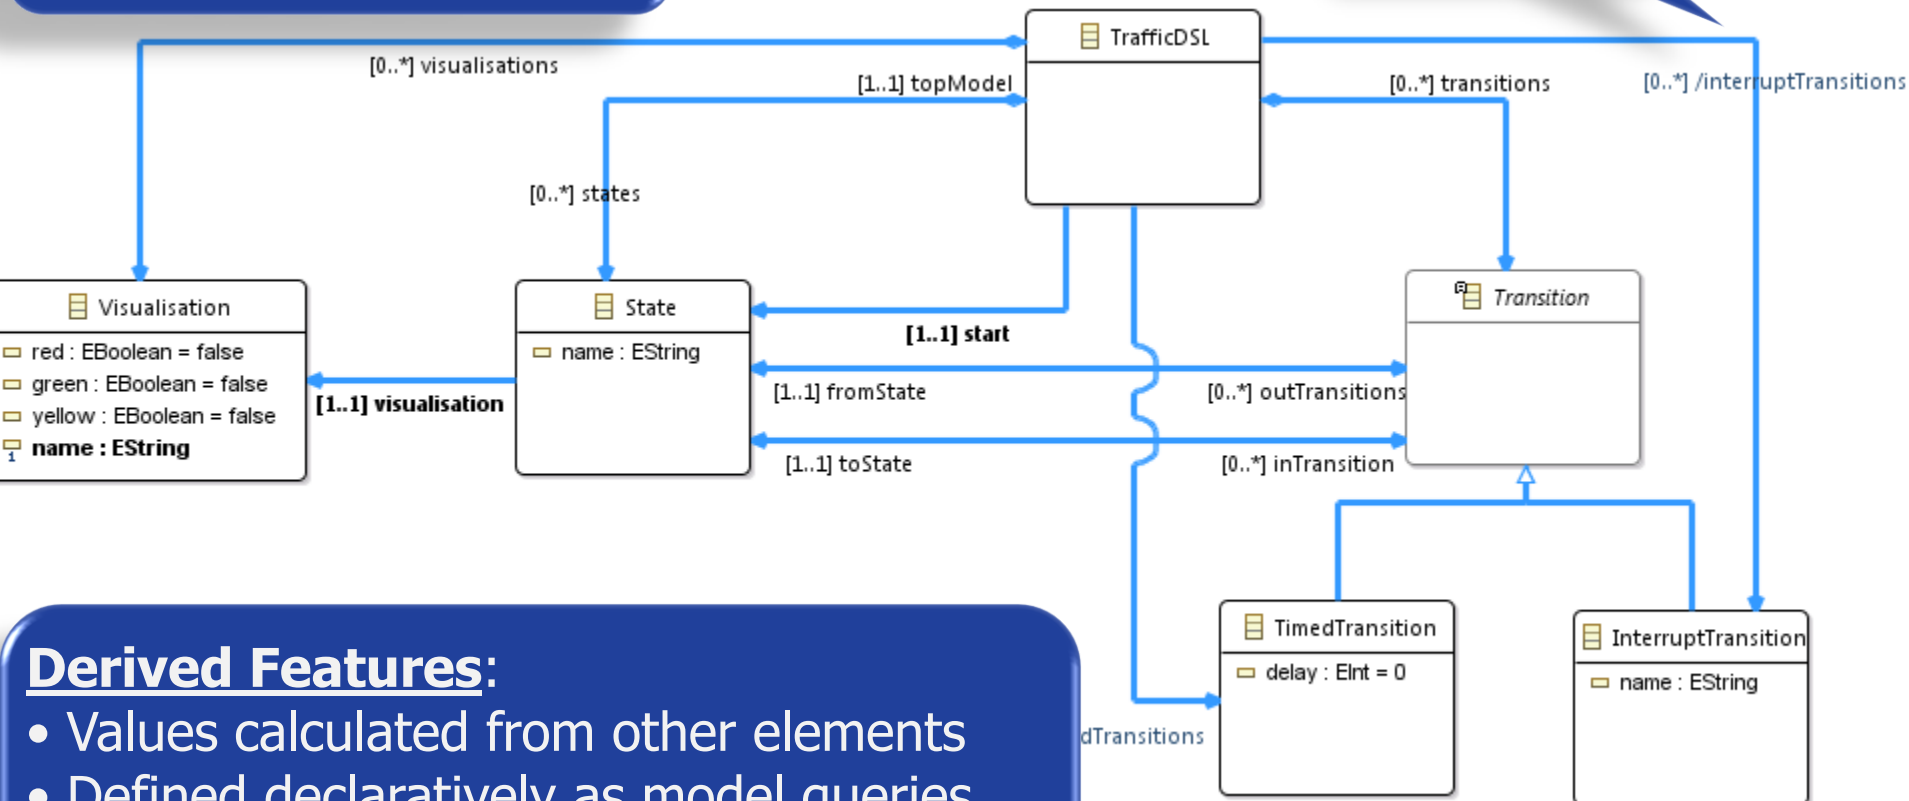

Derived Features:

- Values calculated from other elements
- Defined declaratively as model queries (e.g. OCL, graph queries)
- Tooling: handle as regular EMF elements

Example

Handling Derived Features as Queries

Derived
Reference

DF specification:
as a query

@QueryBasedFeature

pattern

interruptTransitions(DSL:TrafficDSL,T)

{

TrafficDSL.transitions(DSL,T);

InterruptTransition(T);


}

Auto-generated
DF handler (Java)


```
private IncqueryDerivedFeature interruptTransitionsHandler;  
public EList<InterruptTransition> getInterruptTransitions() {  
    if (interruptTransitionsHandler == null) {  
        interruptTransitionsHandler = IncqueryFeatureHelper.getIncqueryDerivedFeature(  
            this, SystemPackageImpl.Literals.DATA_READING_TASK,  
            "system.queries.InterruptTransitions", "TrafficDSL", "InterruptTransition",  
            FeatureKind.MANY_REFERENCE, true, false);  
    }  
    return interruptTransitionsHandler.getManyReferenceValueAsEList(this);  
}
```

INCQUERY VIEWERS

Live abstractions

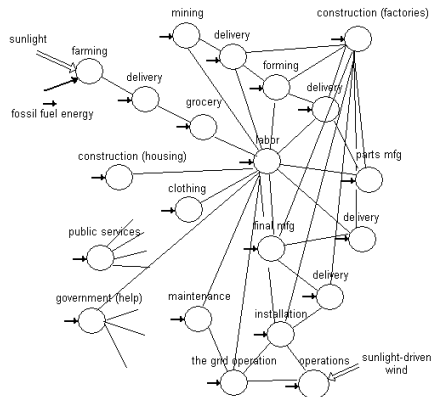

Complex model

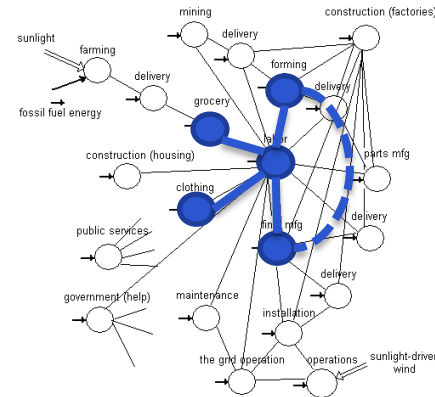

Computed overlay
aka. "View"




Defined by a **query**


Items = SELECT ...

Id	Label	Prop0	Prop1
0	N1	a	B
1	N2	c	D

Live abstractions

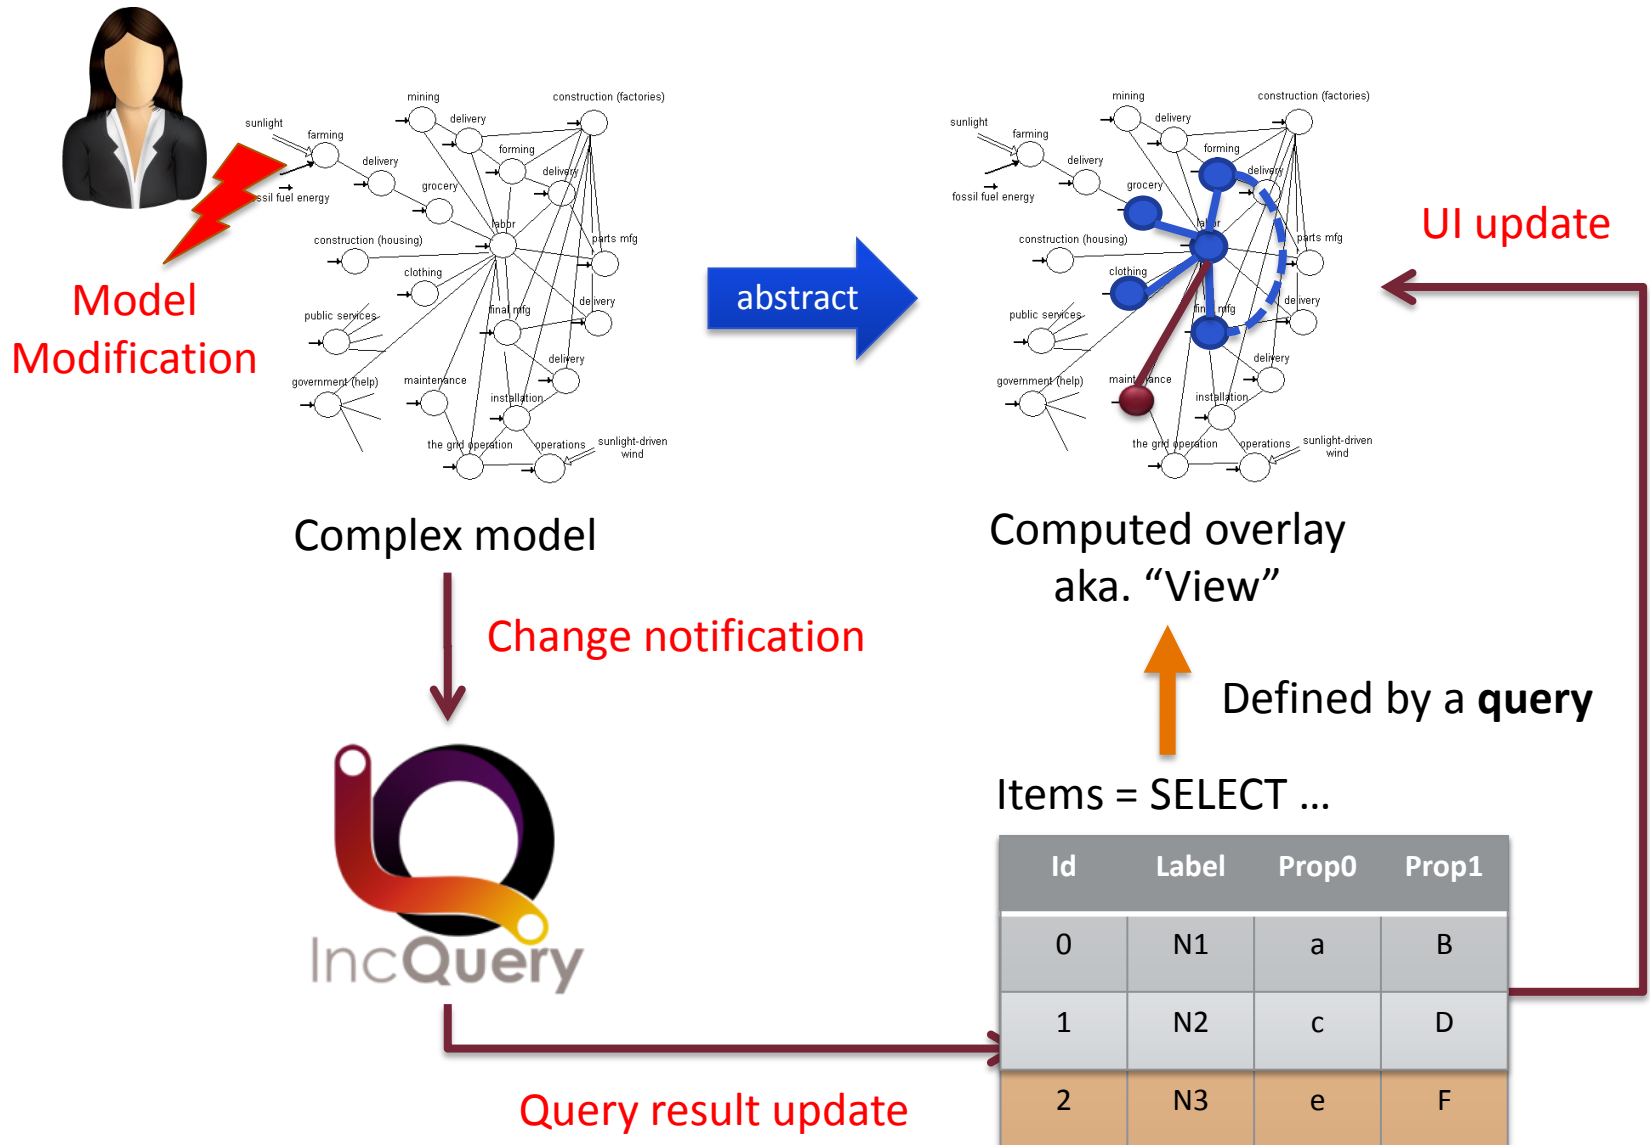

INCQUERY Viewers

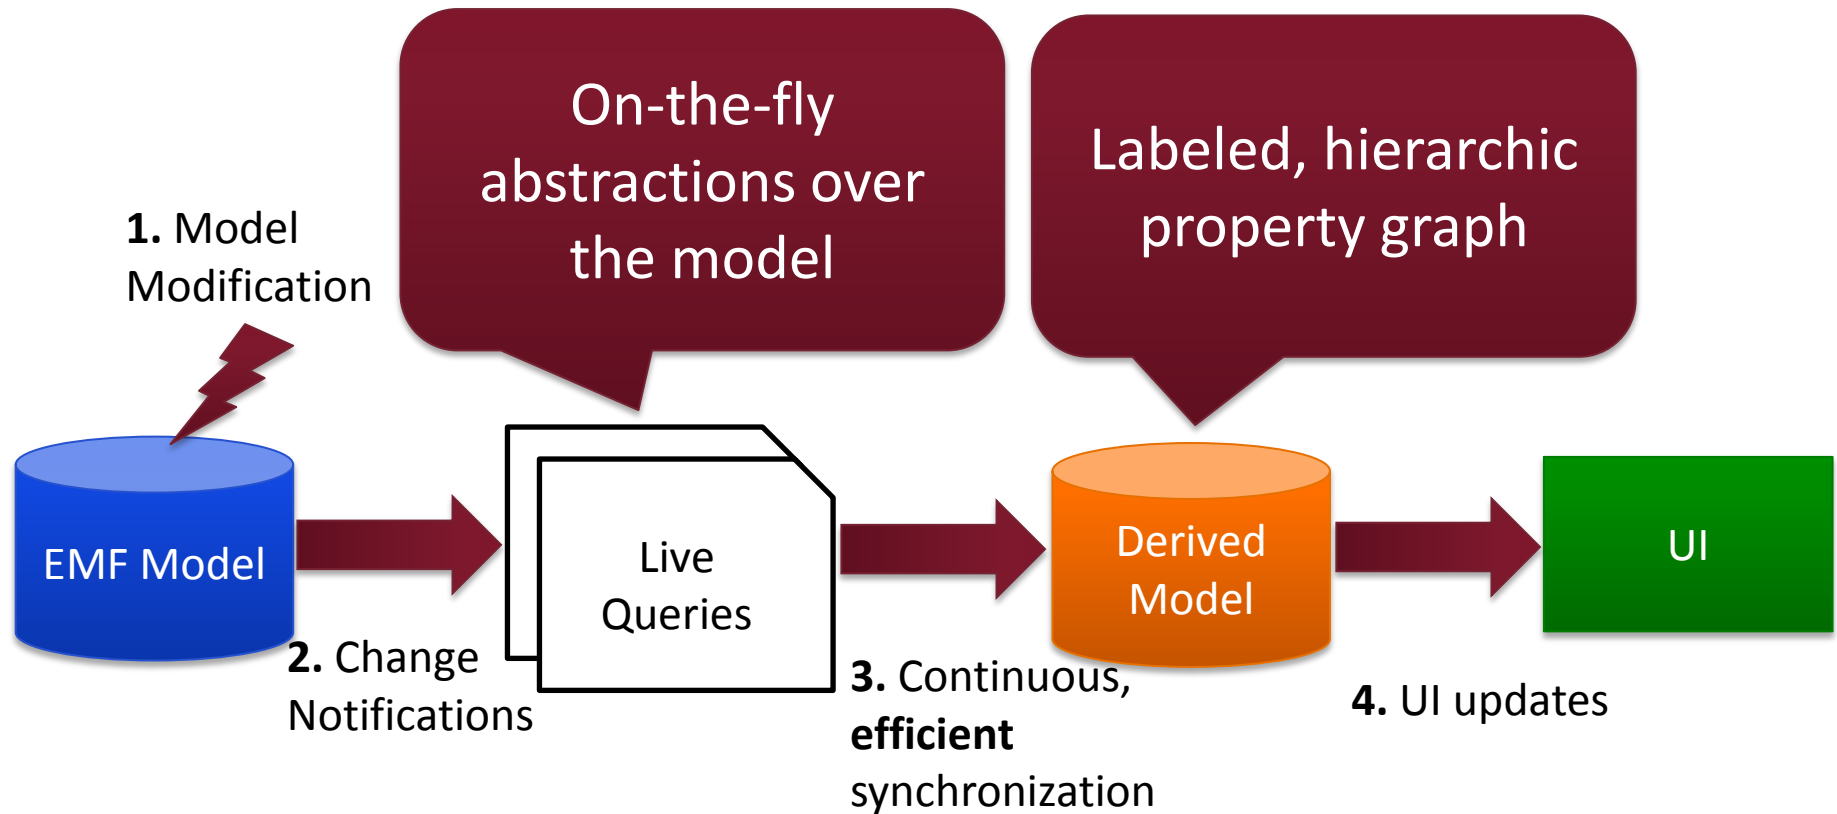

- Visualize things that are not (directly) present in your model
- Provides an easy-to-use API for integration into your presentation layer
 - Eclipse Data Binding
 - Simple callbacks

Example


Query based view annotations

```
@Format(color = "#ff0000")
@Item(item = S, label = "$N$")
pattern redState(S: State) { ... }
```

```
@Item(item = S, label = "$N$")
pattern state(S,N) = { ... }
```

```
@Format(lineColor = "#0000ff")
@Edge(source = from, target = to, label = "$D$ ms")
pattern timedTransition(T,from,to,D) = { ... }
```

```
@Format(lineColor = "#ff0000")
@Edge(source = from, target = to, label = "$E$ event")
pattern interruptTransition(T,from,to,E) = { ... }
}
```

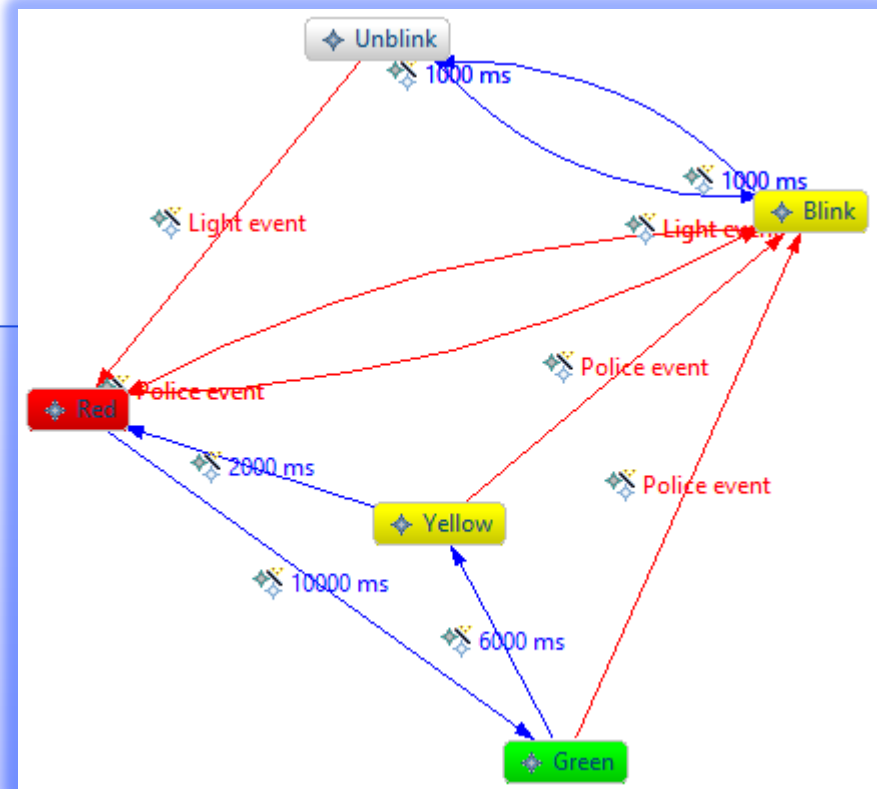

What can I do with all this? – query-based live abstractions

Syntax	Eclipse technology	Pros
Trees, tables, Properties (JFace viewers)	EMF.Edit	The real deal: doesn't hide abstract syntax
Diagrams	GEF, GMF, Graphiti	Easy to read and write for non-programmers
Textual DSLs	Xtext	Easy to read and write for programmers
JFace, Zest, yFiles Your tool!	INCQUERY Viewers	Makes understanding and working with complex models a lot easier